

Save It Easy®

The Ultimate Plug & Save e-Ballast

INLINE T5 adaptor

- Energy Savings of a minimum of 25% guaranteed
- Use electronic T5 lamps in electromagnetically ballasted T8 or T12 luminaires
- High Investment Return
- Quick and easy installation - no electrician required
- Retrofit luminaires in less than 2 minutes
- No Electrician or Wiring Costs
- EEl = A2 Electronic Ballast
- User friendly
- Reversible Retrofit
- Low Ballast Energy Consumption
- 2 Year Warranty
- High Frequency Operation
- Improves Power Factor
- Lower Total Harmonic Distortion
- No Flickering
- Quiet Operation
- Complies with Australian & New Zealand Safety Requirements
- Complies with EMC Requirements
- Plug & Save™ Technology
- Patented in 50 Countries around the World (Australian Patent: 760871) (New Zealand Patent: 509694)



SAVE IT EASY® KIT CONTENTS

- Save It Easy® Electronic Ballast
- Save It Easy® Lamp End Piece
- Save It Easy® Green Starter
- Fitting Instructions and
- Serial Number for Warranty Registration and Ballast Identification

WEIGHT

Approx. 86g

DIMENSIONS

Approx. 77 x 42 x 42mm

MEETS THE FOLLOWING INTERNATIONAL STANDARDS

IEC61347-1 IECCE CB Scheme
Lamp Control Gear
(General & Safety Requirements)

IEC61347-2-3 IECCE CB Scheme
Lamp Control Gear
(Particular Requirements for
AC Supplied Electronic Ballast
for Fluorescent Lamps)

IEC60598-1
Luminaires - Part 1:
General Requirements & Tests

IEC60929
Performance Requirements for
AC Supplied Electronic Ballast
for Tubular Fluorescent Lamps


IEC61547
EMC Immunity Standard

IEC55015
Limits of Radio Disturbance
of Electrical Lighting

IEC61000-3-2
EMC Limits for Harmonic
Current Emissions

IEC61000-3-3
Limitation of Voltage
Fluctuations and Flicker in
Low-Voltage supply

CONNECTION DIAGRAM

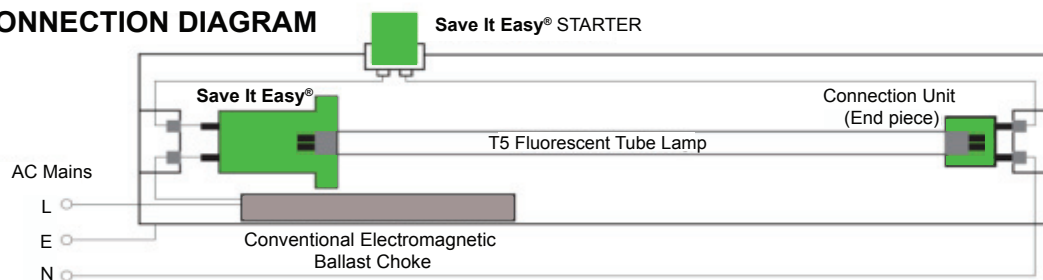

Standard T8 Fluorescent Tube Lamp (FTL) and Luminaire	Type of T8 FTL and Wattage with standard Electromagnetic Ballast (EEl=B2) (Watts)		Type of T5 FTL and Wattage with Save-It-Easy® (Watts)		Power Saving (Watts)	Power Saving (%)
T8 (2 Foot / 590 mm)	18	24.0	INLINE T5 14W	17.0	7.0	29%
T8 (4 Foot / 1200 mm)	36	42.0	INLINE T5 28W	31.0	11.0	26%
T8 (5 Foot / 1500 mm)	58	64.0	INLINE T5 35W	38.0	26.0	40%



saving energy doesn't have to cost the earth™

www.ecobright.com.au
www.ecobright.co.nz

ecoBright® energy solutions
Office 15, 207-211A Buckley St
Essendon 3040 Australia
Tel: +61 3 9331 0027
Fax: +61 3 9331 0028

© Copyright - ecoBright® energy solutions v4AU 0810